


Floating Mirror Instructions


- 1. If using flat mirror-order polished edge. If beveled- the edges are polished as part of the beveling process.
- 2. The mirror can be level with the face of the floater frame or recessed. The gap between glass and frame can also vary from no gap up to about ½" depending on the width of the frames lower leg.
- 3. For frames with a skinny lower leg, use a stretcher bar.







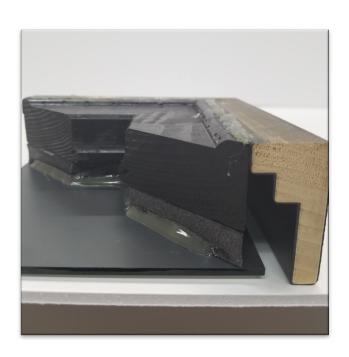

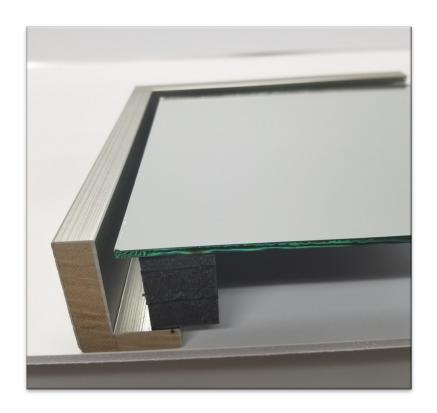

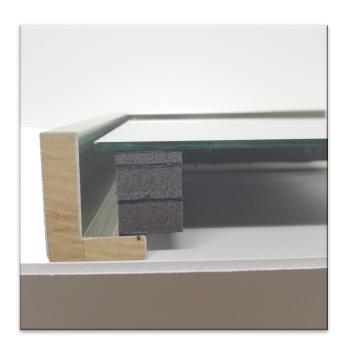

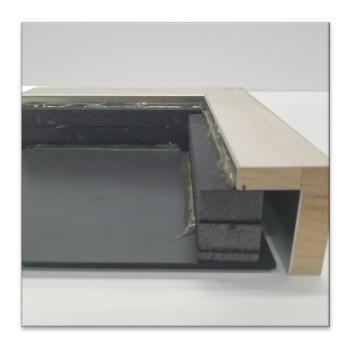

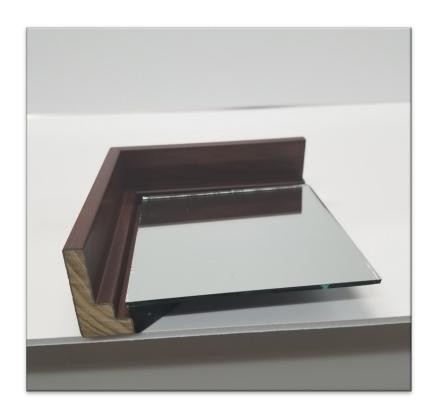







Flush Float in wood frame





Float in a metal frame